



Key Features

Advanced Touch Capabilities and Screen Performance | USB-C with Power Delivery | Designed for Hybrid Environments | myViewBoard Manager



Product Description

Featuring 4K Ultra HD resolution and an advanced, next-generation touchscreen, the ViewSonic® ViewBoard® IFP4320 is perfect for small collaboration spaces in hybrid work environments. With a 43" high-accuracy in-cell touchscreen, this ViewBoard display delivers a smooth handwriting and annotation experience ideal for home offices, workplace cubicles, huddle spaces and more. Integrated myViewBoard® annotation software and ViewBoard Cast streaming software, allow users to remotely collaborate with team members in any location. What's more, USB-C connectivity allows for quick and easy connection to laptops and PCs so that the IFP4320 can function as a primary touchscreen device.

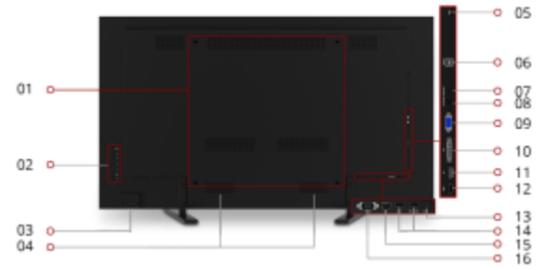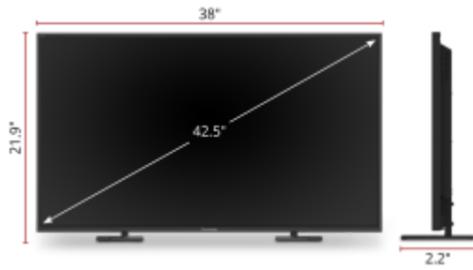

- 1. VESA 400x400
- 2. Menu Controls
- 3. AC In


- 4. Internal Speakers
- 5. USB-C
- 6. USB-B 2.0

- 7. Audio Out
- 8. Line-In
- 9. VGA

- 10. DVI-D
- 11. DisplayPort
- 12. HDMI 2.0

- 13. SPDIF
- 14. USB 2.0 x2
- 15. LAN

- 16. RS232



43"
DISPLAY

RESOLUTION

TOUCH INTERACTIVE

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Select your preferred Country/Region:



Display:

Display Type:	LCD
Display Size (in.):	43
Viewable Area (in.):	42.51
Light Source:	LED
Resolution:	3840 x 2160
Refresh Rate (Hz):	60
Aspect Ratio:	16:9
Static Contrast Ratio:	1,000:1
Backlight Life (Hours):	50,000
Brightness:	350 cd/m2
Response Time (Typical GTG):	9ms
Viewing Angles:	178° horizontal, 178° vertical
Panel Surface:	Anti-glare

Networking:

Ethernet LAN:	10/100/1000 MB
Wifi:	Optional VSB050 wireless adapter

Embedded Player:

OS:	ViewBoard OS based on Android 8.0
GPU:	MaliG51 MP2
CPU:	ARM Quad Core A73+A53
Memory:	3GB LPDDR4
Storage:	16GB eMMC

Audio:

Internal Speakers:	10W (x2)
--------------------	----------

Connector:

HDMI 2.0 In(1), DVI-D(1), DisplayPort(1), Composite RCA(1), USB 2.0 Type B(1), USB 3.1 Type C(1), Ethernet LAN (RJ45)(1)

Power:

Voltage:	100-240 VAC
Consumption (max):	150W
Consumption (typical):	120W
Stand-by:	<0.5W

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	20-80%

Touch:

Touch Technology:	In-cell
Touch Points:	10-Point Touch
Tip Detection:	2.5mm
Other:	Palm rejection, objection awareness

Weight (imperial):

Net (lbs):	39.3
Gross (lbs):	49.49

Weight (metric):

Net (kg):	17.83
Gross (kg):	22.45

Dimensions (imperial) (WxHxD):

Packaging (in.):	47.2 x 30.9 x 8.3
Physical (in.):	38.1 x 21.9 x 2.2

Dimensions (metric) (WxHxD):

Packaging (mm):	1200.0 x 785.0 x 210.0
Physical (mm):	967.0 x 558.1 x 55.7

Mount:

VESA Compatible:	400 x 400 mm
Screw Size:	M6

General:

Warranty: 3-year limited warranty on parts, labor and backlight, onsite warranty

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

PACKAGE CONTENTS: IFP4320 display, power cable, HDMI cable, USB-C, USB-A/B (for touch), AV cable, remote control with batteries, Camera plate, M8 screw x 8, legs, Quick Start Guide

Regulations: cTUVus, FCC, ENERGY STAR, EPEAT Certified, Mexico Energy, CE, CB, RoHS, ErP, WEEE

UPC: 766907010206

Accessories:

NMP760, NMP760-S, VB-EBM-001, VB-EBT-001, VB-EBW-001, VB-PEN-005, VB-STND-001, VB-STND-002, VB-STND-003, VB-STND-004, VB-STND-006, VSB050, WMK-047-2

