


Key Features

- Durable and scratch-resistant IP54 front touchscreen
- Highly responsive 10-points PCAP touch technology
- Long-lasting 24/7 usage
- Adaptable to multi-screen orientations
- Ease of installation with VESA-mountable design



Product **Description**

The ViewSonic's TD3207 is the ideal solution for commercial and industrial spaces. Designed for heavy, continuous usage, the open frame series TD3207 delivers a 24/7 long-life. Resistant to moisture and scratches, the 3mm thick glass screen features an intuitive 10-point PCAP touch technology for maximum interactivity. Featuring SuperClear® AMVA panel technology, the device delivers lifelike imagery, vivid color, and constant brightness of up to 450 nits. Connection options include HDMI and DisplayPort inputs for effortless sharing capabilities and an RS232 allows you to control the device remotely. Equipped with VESA mounting design for any surface and screen orientation, the touch screen is the perfect display for various environments.

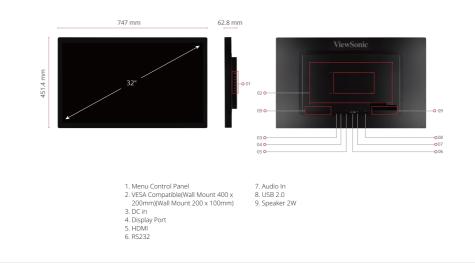



DISPLAY		VIDEO INPUT	
Display Size (in.):	32	Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2)
Viewable Area (in.):	31.5	ERGONOMICS	2.501031 011 (11.2)
Panel Type:	VA Technology	Tilt (Forward/Back):	N/Aº / N/Aº
Resolution:	1920 x 1080	WEIGHT (IMPERIAL)	
Resolution Type:	FHD (Full HD)	Net (lbs):	28.2
Static Contrast Ratio:	3,000:1 (typ)	Net Without Stand (lbs):	28.2
Dynamic Contrast Ratio:	50M:1	Gross (lbs):	34.2
Light Source:	LED		34.2
Brightness:	450 cd/m² (typ)	WEIGHT (METRIC)	12.8
Colors:	16.7M	Net (kg):	
Color Space Support:	8 bit true	Net Without Stand (kg):	12.8
Aspect Ratio:	16:9	Gross (kg):	15.5
Response Time (Typical GTG):	5ms	DIMENSIONS (IMPERIAL) (W	
Response Time (GTG w/OD):	4.6ms	Packaging (in.):	34 x 22.7 x 6.4
,		Physical (in.):	29.4 x 17.8 x 2.5
Viewing Angles:	178º horizontal, 178º vertical	Physical Without Stand (in.):	29.4 x 17.8 x 2.5
Backlight Life (Hours):	50000 Hrs (Min)	DIMENSIONS (METRIC) (WX	
Curvature:	Flat	Packaging (mm):	863 x 577 x 163
Refresh Rate (Hz):	60	Physical (mm):	747 x 451 x 64
Blue Light Filter:	Yes	Physical Without Stand (mm):	747 x 451 x 64
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)	GENERAL	CE, CE EMC, CB, RoHS, ErP,
Pixel Size:	0.364 mm (H) x 0.364 mm (V)	Regulations:	REACH, WEEE, EAC, UkrSEPRO,
Touch Screen:	Projected Capacitive, 10-point multi- touch		UKCA TD3207 x1, 3-pin Plug (IEC C13 /
Surface Treatment:	Glossy, Hard Coating (7H)	PACKAGE CONTENTS:	CEE22) x1, HDMI Cable (v1.4; Male- Male) x1, USB A/B Cable (v2.0; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Cover Glass Thickness:	3mm		
			Please dispose of in accordance with
PC Resolution (max):	1920x1080	Recycle/Disposal:	local, state or federal laws.
Mac® Resolution (max):	1920x1080	Warranty:	*Warranty offered may differ from market to market
PC Operating System:	Windows 10/11 certified; macOS		
	tested		
Mac® Resolution (min):	1920x1080		
CONNECTOR			
USB 2.0 Type B:	1		
3.5mm Audio Out:	1		
HDMI 1.4:	1		
DisplayPort:	1	_	
Power in:	DC Socket (Center Positive)		
RS232 In:	1		
AUDIO			
Internal Speakers:	2Watts x2		
POWER			
Eco Mode (Conserve):	27W		
Eco Mode (optimized):	35W		
Consumption (typical):	43W		
Consumption (max):	45.5W		
Voltage:	AC 100-240V		
Stand-by:	0.5W		
Power Supply:	External Power Adaptor		
CONTROLS			
Physical Controls:	1, 2, Up, Down, Left, Right, Power		
On Screen Display:	Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust,		
	Setup Menu, Memory Recall		
OPERATING CONDITIONS	32°E to 104°E (0°C to 40°C)		
Temperature:	32°F to 104°F (0°C to 40°C)		
Humidity (non-condensing):	20% to 90%		
	400		
VESA Compatible:	400 x 200; 200 x 100 mm		
INPUT SIGNAL			
Frequency Horizontal:	15 ~ 73KHz		
Frequency Vertical:	47 ~ 75Hz	-	